SHINTEK
WWW.SHINTEK.COM

# LAN PCI 10/100

Shintek LAN PCI 10/100 can wake up any computer anywhere on the network at anytime even outside working hours. This new Wake-on-LAN technology affords to deploy operating systems or applications, transfer files, run programs on client workstations, and much more. Furthermore it not only increase throughput and reduce CPU utilization, but also frees you from manually switching between speeds, and duplex modes.

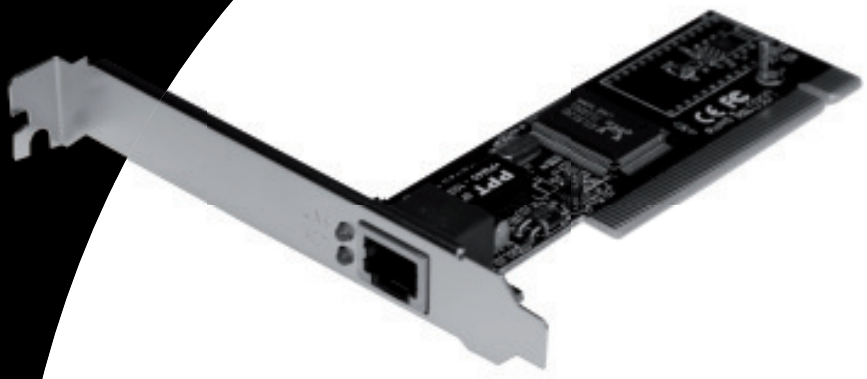

| English | Italiano | Español | Français | FCE32158 |
|---|---|---|---|---|
| Standards | Standard | Estàndares | Normes | IEEE 802.3u: 100BASE-TX<br>IEEE 802.3: 10BASE-T |
| Network Interface | Interfaccia di rete | Interfaz de red | Interface de réseau | RJ-45 |
| LED Indicators | Led | Indicador LED | Voyant LED | Link/ACT |
| Interface | Interfaccia | Interfaz | Interface | 32-bit nPCI |
| Operating Temperature | Temperatura di esercizio | Temperatura de funcionamiento | Température de fonctionnement | 20°C /70°C |
| Storage Temperature | Temperatura di immagazzinaggio | Temperatura de almacenamiento | Température de stockage | 40°C /80°C |
| Os Supported | Sistemi Operativi supportati | Sistemas Operativos compatibles | Support du Système d'exploitation | Win98SE, ME, 2000,2003, XP, Vista, Linux |

WAKE-ON-LAN TECHNOLOGY

SUPPORT FLOW-CONTROL

SHIELDED RJ-45 PHONE-TYPE JACK

HIGH THROUGHPUT AND LOW CPU UTILIZATION

CE FC RoHS COMPLIANT 2002/95/EC

COD. PROD:FCE32158

FCE32158

8032706321587